


SBP22AHD-FIR5024



Dimensions

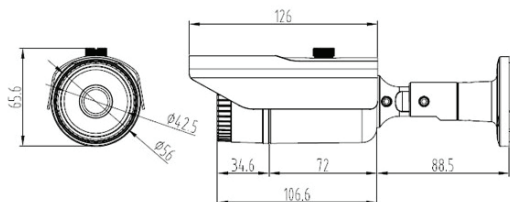

Product Summary

- 1/3" SONY CMOS 2.43MegaPixel
- AHD 2.0 Output (Analog FHD)
- D- WDR (Digital Wide Dynamic Range)
- 3D + 2DNR (Digital Noise Reduction)
- SENS UP, SMART IR, DEFOG
- HLMASK (High Light Masking)
- Privacy Masking, Motion Detection
- LSC (Lens Shading Correction)
- ACE (Adaptive Contrast Enhancer)
- 3.6mm Mega Pixel Lens
- OSD (On Screen Display-Option)

Major Specifications

* OSD Menu is subject to change without prior notice

| MODEL NAME | SBP22AHD-FIR5024 | |
|-----------------------|--|----------------|
| | NTSC | PAL |
| Image Device | 1/3 Inch SONY CMOS, 2.43MegaPixel | |
| Total Pixels | 2000(H) x 1241(V), 2.48 Megapixel | |
| Effective Pixels | 1984(H) x 1225(V), 2.43 Megapixel | |
| Scanning System | 2:1 Interlace | Non- Interlace |
| Synchronization | Internal Synchronization | |
| Horizontal Resolution | More Than 1000 TV Lines | |
| Video Output | AHD 2.0 Output (1080P@30fps) | |
| S/N Ration | More Than 52dB (AGC OFF / F1.2) | |
| Shutter / AGC | Auto (High, Low Luminance) / Manual | |
| White Balance | ATW / AWC / Indoor / Outdoor / Manual / AWB | |
| Picture Adjustment | Mirror / Brightness / SENS-UP / Sharpness / Monitor / Gain | |
| ATR | 2DNR (Low, Mid, High, OFF) / 3DNR (Low, Mid, High, OFF) | |
| Motion / Privacy | ON / OFF | |
| Lens | 3.6mm Mega Pixel Lens (ICR) | |
| LED | 24pcs IR LEDs | |
| Storage Temp. | 14°F ~ 122°F (-10°C~ + 50°C) | |
| Operating Temp. | 4°F ~ 140°F (-20°C~ + 60°C) | |
| Humidity | Less than 80% | |
| Cable | Standard 1.0m BNC/DC Jack | |
| Power Source | DC12V 350mA | |
| Dimensions | 56mm(Φ) X 195.1mm(L) X 65.6mm(H) | |
| Net Weight | Approx. 300g | |