


SVM04EP / SVM08EP



Dimensions

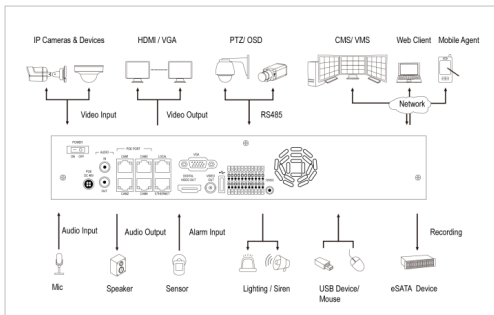

Product Summary

- 4CH / 8CH UHD 4K NVR support
- ONVIF Compatible & Auto IP Camera Detection
- Intelligent Dual (Main & Sub) Stream
- PoE Switching HUB Built-in (upto 4 ch / 8ch supported)
- Local Monitoring (HDMI/ VGA)
- Gigabit LAN/ Upnp
- PUSH Notification to iPhone / iPad & Android Phone
- Remote Monitoring by Remote S/W(CMS) & Smart Phone
- Plug & play with Built-in POE

Major Specifications

* OSD Menu is subject to change without prior notice

| Model Name | | SVM04EP | SVM08EP |
|-----------------------|-----------------------------------|--|--------------|
| SYSTEM | Operating System | Embedded Linux | |
| | Max. HDD | 1 x SATA HDD | 2 x SATA HDD |
| VIDEO / AUDIO | Protocol | ONVIF | |
| | Video In | 4 Ch (IP) | 8Ch (IP) |
| | No. of PoE | 4 Ch | 8 Ch |
| | Video Out | HDMI, VGA, Composite | |
| | Display | UHD (4K) | |
| | Audio IN / Out | 1ch / 1ch | |
| | Alarm Input / Out | 4ch / 1ch | |
| RECORDING | Recording Speed | 2MP/30fps | |
| | Recording Mode | Continuous Schedule, Sensor, Motion, Pre&Post Alarm, Emergency Recording | |
| PLAYBACK | Speed | x1, x2, x4, x8, x16, x32 | |
| | Channel | 1 / 4 ch split : Main stream, 9/16 ch split : Sub stream | |
| | Search | Calendar (Date / Time) search, Event search | |
| | Backup Device | USB , Network Backup by CMS, File Backup to FTP | |
| NETWORK | LAN | Gigabit Ethernet (RJ45) - Fixed IP, DHCP & DDNS | |
| | Advanced Function | 1) Live Monitoring, Playback and File Backup on Remote | |
| | | 2) Time Synchronization by NTP Server ("pool.ntp.org") | |
| GENERAL | Management | CMS & MMS (Smart Eyes) , Web (IE) | |
| | System Recovery | Auto-Reboot and Journaling File System | |
| | Advanced | 1) Import & Export of Setting Value, Water-Mark, AVI Backup | |
| | | 2) HDD SMART Info | |
| | Functions | 3) Warning Alarm for System Over-Temperature | |
| | | 4) Digital Zoom for both Live & VOD mode | |
| | Power | DC12V / 2A *POE : 48V / 1A | |
| Operating Temperature | 5~40 °C / 10~80% RH | | |
| Dimension | 260 x 237 x 44 (mm) / 1U // 2.5Kg | | |
| Certification | CE & FCC | | |