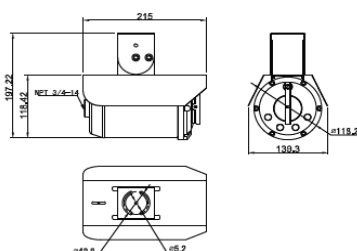


SVNP-M6S55XR

SONY
STARVIS

Dimensions**Major Specifications**

* OSD Menu is subject to change without prior notice

Model Name		SVNP-M6S55XR
Video	Image sensor	1/2.8" 2.18 Megapixel Stavis CMOS
	Total Pixels	2130K Pixels
	Resolutions	1080p@60/30fps, 1080i@60fps, 720p@60fps
	Sync	Internal
	Min. Illumination	0.0008 X 1/4s(IR On: 0 lx)
	Recommended illumination	100 to 100,000 lx
	S/N Rating	>50db
	Image Output	HD-SDI, CVBS 750hm / AHD2.0(option)
	Zoom Ratio	Optical 30x(f = 4.3 to 129mm, Digital 12x)
	Min Distance	10mm(Wide End) to 1200mm(Tele End)
	Angle of View(H)	63.7"(Wide End) to 2.3"(Tele End)
	Housing Material	SUS316/316L Stainless Steel
	Dim/Weight	215(L) X 118(Φ) 3Kg
Power	AC24V or DC27V 3A 60/60Hz Max 36W	
Operating Temperature	-40~ + 60°C	
Function	Day/Night	Auto / Day / Night
	BLC	On / Off
	White Balance	AUTO,ATW, Indoor, Outdoor, One push WB, Manual
	Noise Reduction	On / Off(Level 5 to 1/ Off, 6 steps)
	Gain Control	Auto/Manual(0~43, 1db, 0~28Steps) Max Gain Limit (9.2~43.1db, 6~28Steps)
	High Resolution	On / Off
	Image Stabilizer	On / Off
	Digital Zoom	On / Off
	HLC	Off/Low/Mid/High
	Degog	On / Off
	WDR	Off/Low/Mid/High
	Motion Detection	On / Off
	LIVE PIP	On / Off
	Motion Alarm	4 Alarms
	IR Lighting	Auto / Night
	IR Distance	100M
	Cam Control	RS-485/RS422/IP Network
Audio	Aux 2CH(NO/NC)	
Network	Ethernet	RS-45 For 10/100 Base - T
	IP Protocol	IPv4/V6 HTTP, HTTPS, FTP, TCP, RTSP, RTCP, RTP, DNS, DynDNS, NTP, QoS Layer 3, Diffserv, ICMP, IGMP, UPNPTM, SSL, TLS
	Standard Protocol	Onvif(Profile S)
	Video Format	H.264 / MPEG / MPEG-4
Audio	G.711	

Product Summary

- Light weight IR Ex-Proof Camera (3KG)
- Sony Starvis High Sensitivity Image Sensor
- Optical 30x / Digital 12x
- Cable Entry : NPT 3/4" – 14
- Heater / Fan / Temp Sensor built in
- High Power LED / Condenser Lens
- Tempered Glass / Wiper
- Interlock function with Washer Pump
- SUS 316/316L Stainless Steel
- Ex Grade : II2GD, Ex db IIC T6 Gb, IP66/68, Ex tb IIIC T85° Db
- IP / AHD / HD-SDI / CVBS